

Next Generation High Intensity LED Speed Signs

LED Speed Signs



2 1/2-digit

3 1/2-digit

NEW
from
STALKER

Stalker's new Speed Signs use high-intensity LEDs with no moving parts to break or wear out and are thinner and lighter than their old-generation counterparts. These new Speed Signs do things that the old flip-signs can't do, such as connecting up to three Speed Signs to a Pro II radar to simultaneously show Pitch, Plate, and Hit speeds.

- Lightweight and durable
- Stable swingout feet
- Folds flat for easy storage
- Hangs with integrated top corner hooks
- Bright, easy-to-read LED digits

Stalker LED Speed Signs interface with all Stalker Sport radar guns through the use of connectors and dedicated cables.

- Stalker ATS II
- Stalker Pro II
- Stalker Sport 2
- Stalker Solo 2
- Stalker Sport
- Stalker Pro

Available in 2 1/2- and 3 1/2-digit models. Its specifications are:

Model:	2 1/2-Digit Speed Sign	3 1/2-Digit Speed Sign
Dimensions:	15.5" (39.4cm) wide 9.5" (24.1cm) high 1.375" (3.5cm) deep	21.5" (54.6cm) wide 9.5" (24.1 cm) high 1.375" (3.5cm) deep
Weight:	6.05 lbs. (2.74kg)	8.05 lbs. (3.65kg)
Digit height:	8.0" (20.3cm)	8.0" (20.3cm)
Input Voltage:	8 to 24 volts (.12 A @12 VDC)	8 to 24 volts (.15 A @12 VDC)

Stalker LED Speed Signs are manufactured in the United States and backed by a 2-year full warranty.

The LED Speed Sign is weather resistant, but should be kept out of heavy rain. The external power supply is not waterproof and should be kept dry at all times.

Stalker Radar's 8" digit height, 2 1/2- and 3 1/2- digit LED Speed Signs share the next-generation technology of the Stalker's new line of sports radar.

STALKER[®] Sports Radar
The World Leader in Speed Measurement

888-STALKER

StalkerRadar.com

LED Speed Signs

LED Speed Sign Setup

The Stalker LED Speed Sign features rotating feet that fold parallel to the sign's case for easy storage. To position the Speed Sign on a flat surface, rotate the feet 90 degrees so that they are perpendicular to the sign's face. Alternatively, hang the sign using the integral top-corner hooks.

Connecting a Radar and a Sign

In order for the Speed Sign to properly recognize the particular radar gun model and its data, the unit(s) should be connected in the following manner:

- 1) connect data cable to radar and sign
- 2) apply power to sign by connecting the external power supply*
- 3) power up radar

The Stalker LED Speed Sign will automatically recognize the type of radar and the data format the radar is sending to the sign.

*** EXTERNAL POWER SUPPLY IS NOT WATERPROOF. KEEP DRY AT ALL TIMES.**


Speed Sign Controls

The Stalker LED Speed Sign's controls are located on the lower left side of the unit. A momentary push-button switch initiates LED testing sequences in the following modes:

- Push 1** – Table Demonstration Mode: Slow count, full digit flash, slow count, fast count, loop...
- Push 2** – Fast count
- Push 3** – All LEDs on
- Push 4** – Show software version
- Push 5** – Enter normal mode

Configuration

To configure multiple LED Speed Signs using the Stalker Pro II radar, use Speed Sign multiple sign cabling hub, 200-0815-00. Set DIP switches 6, 7, and 8 to their appropriate positions before connecting the radar and signs.

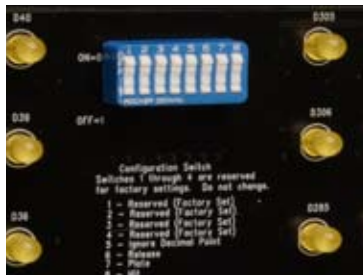

Switch Position	2½-Digit Speed Sign part number - 200-0778-00	3½-digit Speed Sign part number - 200-0779-00
Switch 1: ON	Set to ON when receiving RS-232 data from Legacy K-Sport.	
Switch 2: Reserved	Unused	
Switch 3: Reserved	Unused	
Switch 4: Reserved	Unused	
Switch 5: ON, Ignore Decimal Point	The 2½-Digit LED Speed Sign ignores the decimal point and anything following.	The 3½-Digit LED Speed Sign ignores anything following the decimal point. "123.4" is displayed as "123". "1234.5" is displayed as "1234".
Switch 6: ON	Displays - Release Speed	Used only with Stalker II Pro II Baseball. Switches select which Speed Reading is displayed.
Switch 7: ON	Displays - Plate Speed	
Switch 8: ON	Displays - Hit Speed	
Default setting: All 8 switches OFF.		



An external switching power supply converts 110 VAC or 220 VAC into 12 VDC and connects to the sign through a 5.5mm x 2.5mm center-positive jack.

A male DB-9 connector, receives data from the radar unit.

The Stalker LED Speed Sign interfaces with all newer Stalker Sport radar guns through the use of connectors and dedicated cables.

The following models use the cable and connector listed beside them:

Stalker ATS II	155-2284-00 Autodetects 1200 or 9600, format A or bE, whole or tenths numbers.
Stalker Pro II	155-2284-00 Autodetects 1200 or 9600, format A or bE, whole or tenths numbers.
Stalker Sport 2	155-2287-25 No user configuration required.
Stalker Solo II	155-2287-25 No user configuration required.
Stalker Sport	155-2271-00 200-0163-02 (connector) 030-2589-00 (gender changer) No user configuration required.
Stalker Sport	155-2271-00 200-0163-02 (connector) 030-2589-00 (gender changer) No user configuration required.

888-STALKER

STALKER® Sports Radar

The World Leader in Speed Measurement

applied concepts, inc.

2609 Technology Drive ■ Plano, Texas 75074
972.398.3780 ■ Fax 972.398.3781

StalkerRadar.com

