



Stalker Speed CCTV Sensor

FEATURES

- Compatible with most video surveillance systems
- Affordable and portable
- Tracks vehicles up to 900 feet
- Waterproof and weatherproof
- Low power consumption
- Made in America
- 2-Year parts and labor warranty

Add accurate and powerful speed sensing capabilities to your existing CCTV system

Take your CCTV to the next level by including a speed/date/time stamp on your video evidence.

The Stalker Speed CCTV Sensor is accurate and powerful, and when added to an existing CCTV system, provides enforceable speed violation evidence for private use.

This sensor can be used to monitor speeds of vehicles at commercial facilities where controlled speeds are required to maintain a safe and productive environment.

Typical applications would be monitoring forklifts in a warehouse, tractor trailer rigs in trailer yards, or private vehicles in company, retail, or apartment parking lots.

This sensor is not intended for law enforcement use in the United States.

The Stalker Speed CCTV Sensor creates a monochrome on-screen display on either standard NTSC or Pal video streams. Connection is made by using the two BNC jacks, one for input and one for output. The connections can be made with common 75 ohm coaxial cable.

The sensor adds current date with a time stamp, along with the speed of the strongest detected target.



StalkerRadar.com

800-STALKER

STALKER® Intelligent Technologies



Stalker Speed CCTV Sensor

The Stalker Speed CCTV Sensor is accurate and powerful, and adds speed sensing capabilities to your existing CCTV system.

Performance

Speed range	1-200 mph (1-321 km/h)
Speed resolution	1 mph (1 km/h)
Speed accuracy	+/- 0.3%
Range	900 feet (274 meters)
Update rate	20 times per second
Directivity	Closing, away, or both
Cosine adjustments	2 axis

Power



Voltage	10 to 30 VDC
Power	<1.5 watts
Current @ 12 VDC	125 mA

Microwave

Frequency	24.125 GHz (US) 24.200 GHz (EU)
Power	100 mW
Beam width	30° by 32°
Certification	FCC part 15

Environmental and Packaging

Temp. range	-30° to +70°C
Ingress rating	IP67
Housing	Die-cast aluminum
Size	4.4 x 3.9 x 1.6 inches (11.2 x 9.9 x 4 cm)
Mounting	4 x 10-32 UNF

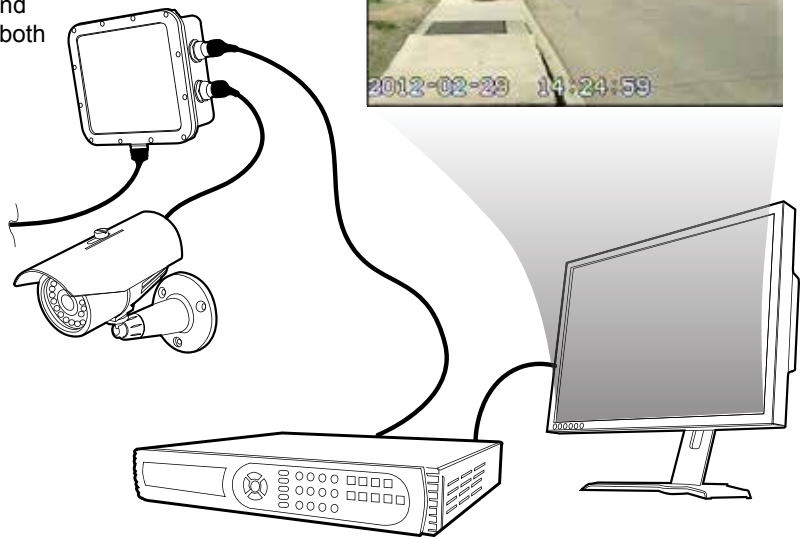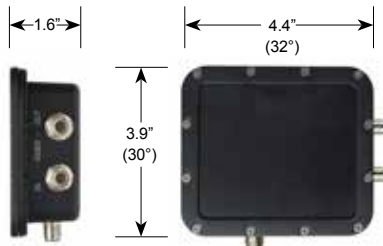

Accessories

For a complete list of available accessories, go to our Web site at www.StalkerRadar.com.



STALKER Intelligent Technologies



800-STALKER

applied concepts, inc.

StalkerRadar.com

2609 Technology Drive ■ Plano, Texas 75074 ■ 972.398.3780 ■ Fax 972.398.3781